


**MAGNETICS H**

**708-010201023060**

MAGNETICS H PDI SUSPENSION made of die-cast aluminium, black, similar to RAL 9005, sated PMMA opal diffuser beam 100°, light output direct / indirect, with converter, max. 700mA, dimmability: not dimmable, cable Tension control in the suspension ropes, adapter/ceiling base black, pendant length 2000mm, IP20 directly/ indirectly illuminated




**DRAWING**

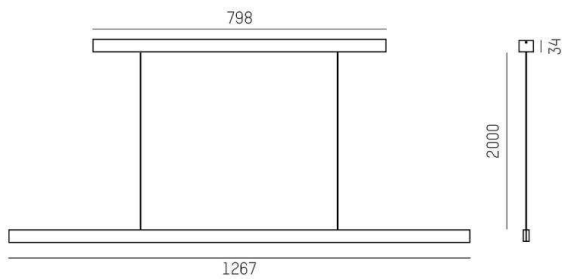

**TECHNICAL DETAILS**

System perform. [W]	30
Bulb type	LED
Luminous flux [lm]	2300
Current sec. [mA]	700
Colour temp. [K]	2700K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Beam angle [°]	100°
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	1267
Width [mm]	16,6
Height [mm]	35
Pendant length [mm]	2000
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK03
Net weight [kg]	2,99
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
Electric wire	Tension control in the suspension ropes
EAN-Number	9010870159105
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	36

**LIGHT DISTRIBUTION CURVE**

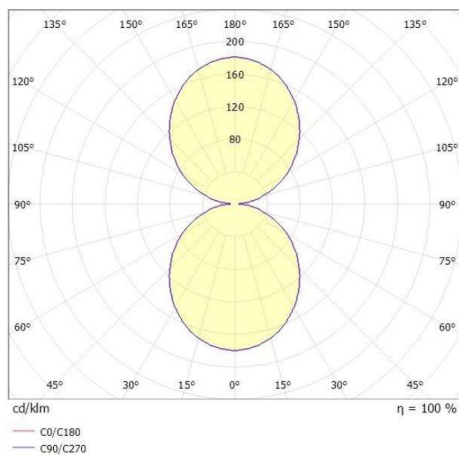

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.